




# tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

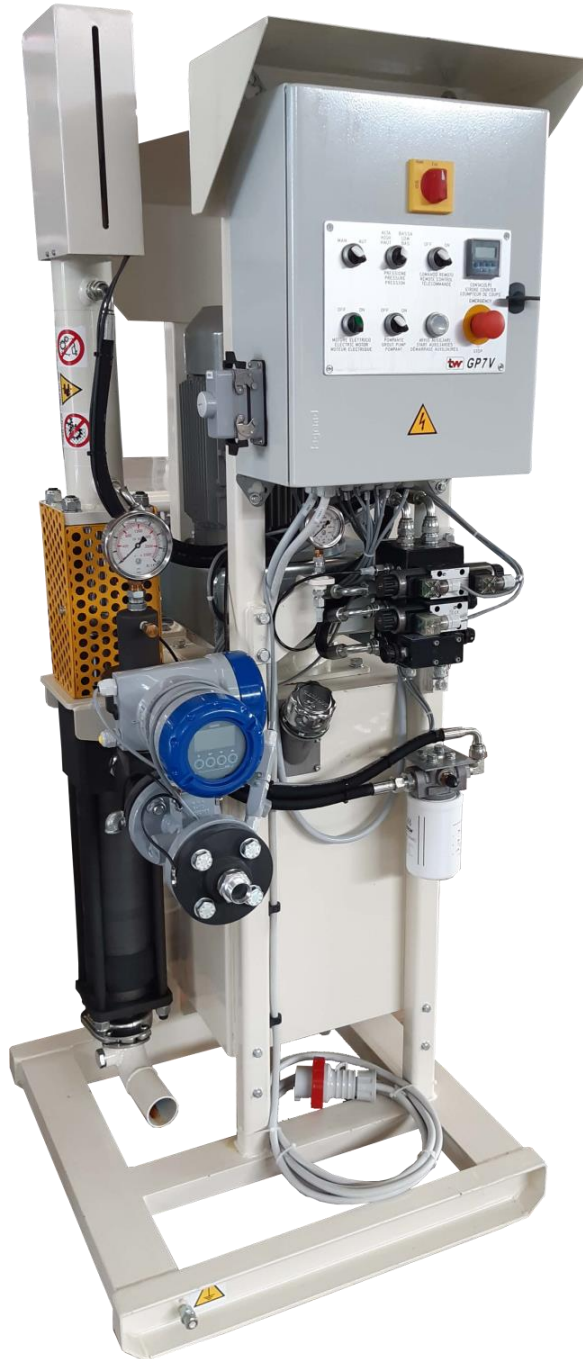


## GP3V - GP5V - GP7V

VERTICAL GROUT PUMP

## Overall dimensions and weight

Width	770 mm	2'7"
Lenght	770 mm	2'7"
Height	1901 mm	6'3"
Weight	420 Kg	926 lb

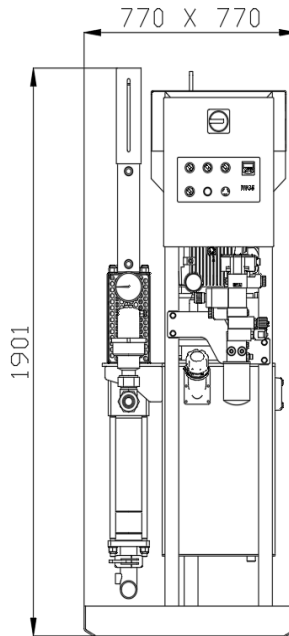

## TECHNICAL FEATURES

**Double effect piston** / piston à double effet / Doppeleffekt Kolben

**Electric motor** / moteur électrique / Elektromotor

3 Kw

5,5 kW

7,5 kW

**Max flow rate** / débit maximale / maximale Durchflussrate

**36 lt/min**  
**9,5 gpm**

**62 lt/min**  
**16,4 gpm**

**Max pressure rate** / pression maximale / maximal Druckrate

**90 bar**  
**9 Mpa**  
**1305 PSI**

**100 bar**  
**10 Mpa**  
**1450 PSI**

**Piston diameter** / diamètre du piston / Kolbendurchmesser

3"1/2 - 88,9mm

4" - 101,6 mm

**Stroke** / course / Hubweg

6" - 152,4mm

8" - 203,2 mm

**Suction diameter** / diamètre d'aspiration / Saugdurchmesser

2" - 50,8mm

3" - 76,2 mm

**Output diameter** / diamètre de sortie / Ausgangsdurchmesser

1" - 25,4mm

1"1/4 - 31,75 mm

**tw tecniwell**

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT


Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086  
e-mail: [info@tecniwell.com](mailto:info@tecniwell.com) – [www.tecniwell.it](http://www.tecniwell.it)

All technical data are purely indicative and subject to change without notice

DIAGRAMMA PORTATA - PRESSIONE  
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE  
(gpm)

GP3V

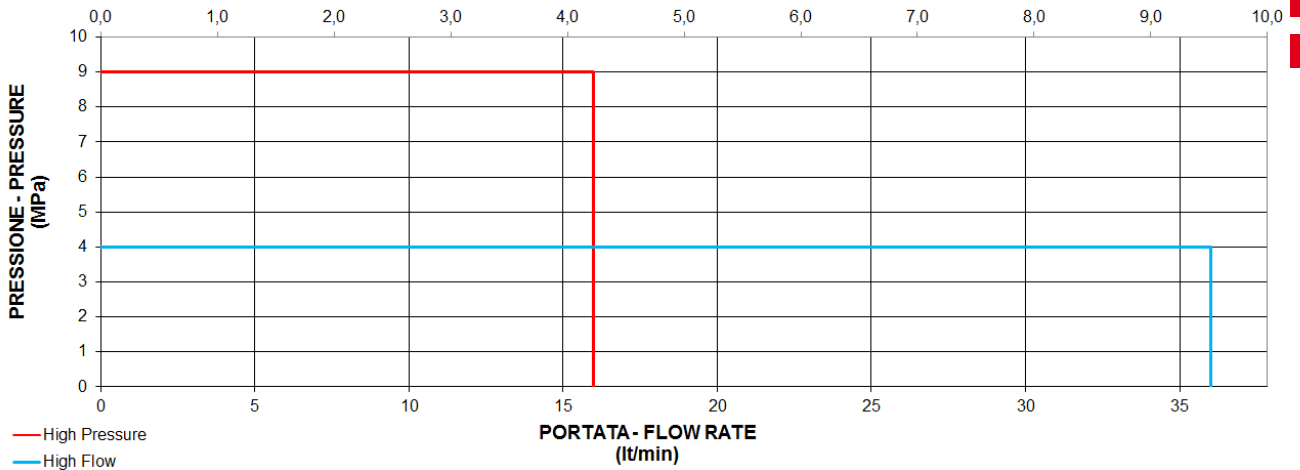


LCD Control panel (optional)  
with recording system and preset volume / pressure  
injection control



GP5V  
GP7V

DIAGRAMMA PORTATA - PRESSIONE  
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE  
(gpm)

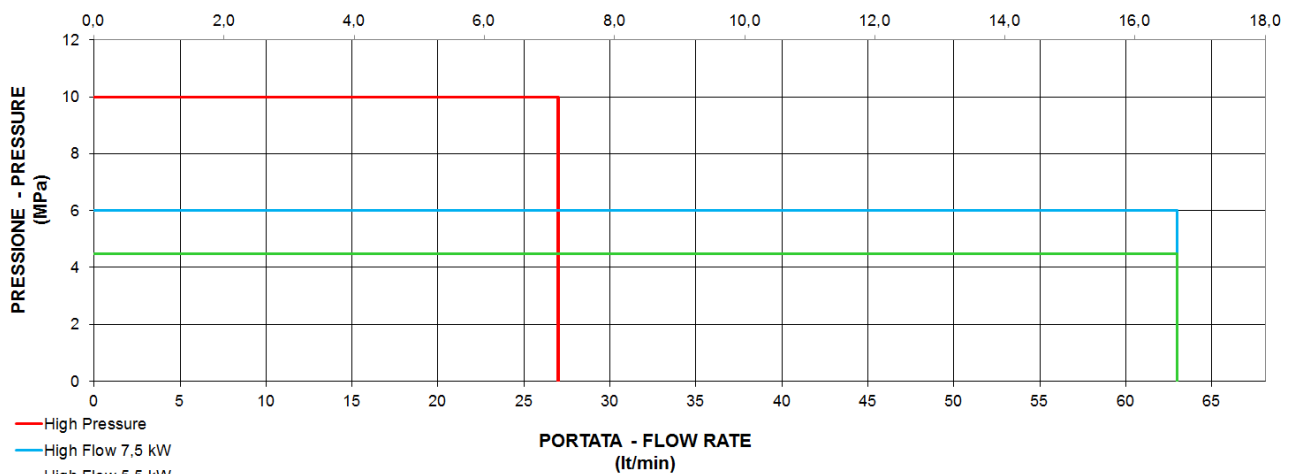



**Productivity** and **Reliability**  
with full **Safety** compliance.

