





tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

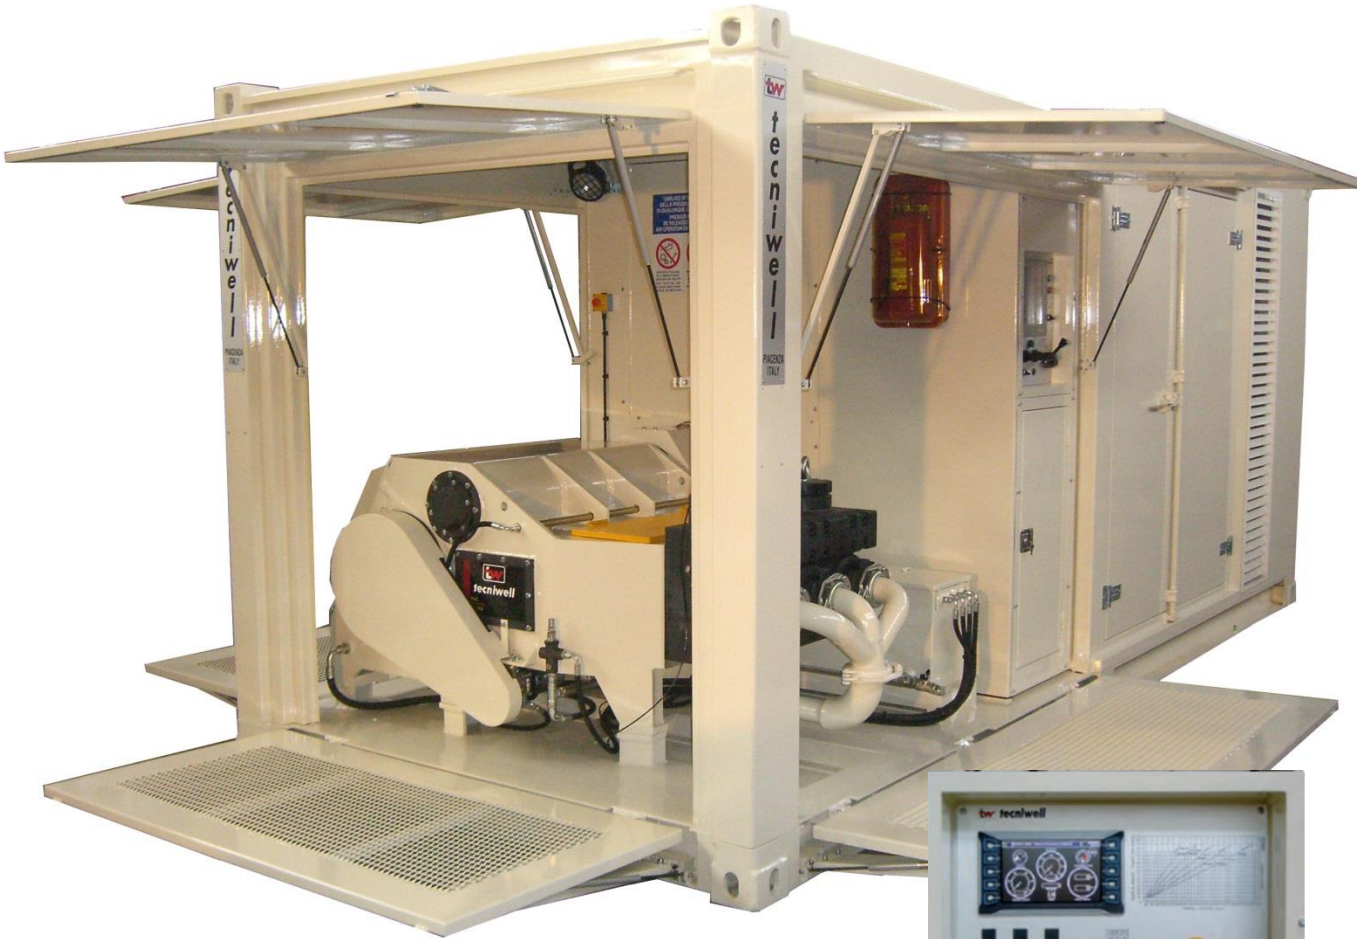

TW 500

HIGH PRESSURE TRIPLEX PUMP

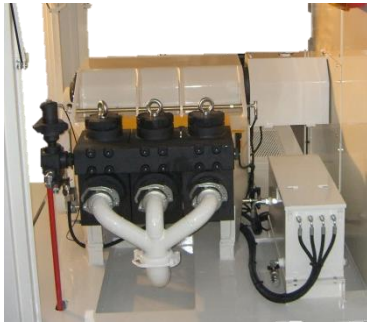

Technical Features

Max power input / puissance max / maximale Kraft	400 kW	545 HP	
Max pressure / pression maximale / maximaler Druck	80 MPa	800 bar	11600 psi
Max flow rate / débit maximale / maximale Durchflussrate	625 lt/min	165 gpm	
Piston diameter / diamètre du piston / Kolbendurchmesser	From 3" (76,2mm) to 5" (127mm)		
Stroke / Course / Hubweg	5" – 127		
Maximum stroke rate / coup par minute / max Hub pro Minute	150 / min	150 spm	
Suction diameter / diamètre d'aspiration / Saugdurchmesser	4"	101,6 mm	
Output diameter / diamètre de sortie / Ausgangsdurchmesser	1"1/2	38,1 mm	


7" Control panel lcd monitor

Bareshaft dimensions and weight

Width 1405 mm - 4'7"	Height 910 mm - 2'12"	Lenght 2200 mm - 7'2"	Weight 5400 Kg - 11900 lb
----------------------	-----------------------	-----------------------	---------------------------

Container dimensions and weight

Width 2438 mm - 7'12"	Lenght 6055 mm - 19'10"	Height 2591 mm - 8'6"	Weight 13100 Kg - 28880 lb
-----------------------	-------------------------	-----------------------	----------------------------

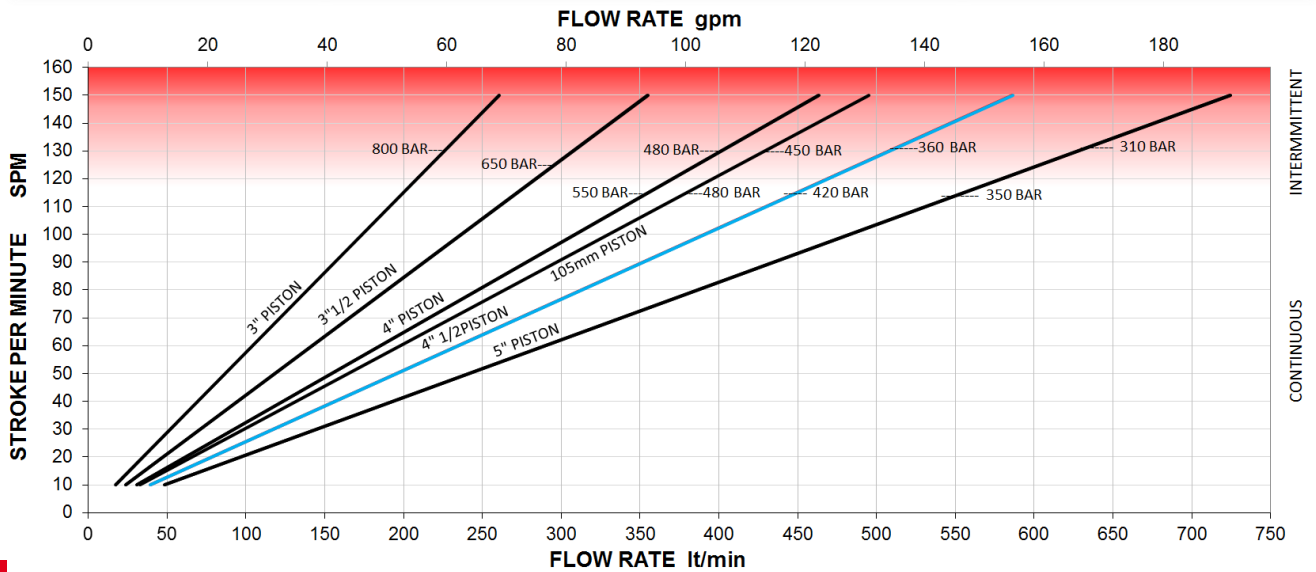

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecnivell.com – www.tecnivell.it

All technical data are purely indicative and subject to change without notice