



MINI AIR GROUT

PNEUMATIC GROUTING UNIT

ITALSWISS Engineering S.r.l.

Strada Romana di Sotto, 27 - 28877 ORNAVASSO (VB) - ITALIA

Tel. ++39 - 0323 - 837 116 Fax. ++39 - 0323 - 835 369 E-mail: arrigo.scarin@italswiss.net Web page: www.italswiss.com

TECHNICAL SPECIFICATION

Mixer

Pump

Single bin Pneumatic mixer (on wheels)

Pneumatic motor : 1,25 Kw
 Sound level : 87 dBa max
 Tank capacity : 80 l
 Rotation speed . 60-300 rpm
 Mixing time : approx. 2 min
 Weight : 80 kg
 Air consumption : 300 l/min at 8 bar

Mini Air Grout I


Air-driven piston diam 160
 Double effect pump
 Stroke: 150 mm
 Flow rate : 60 l/min max at 8 bar air pressure
 Injection pressure : max 60 bar with air pressure 8 bar
 Air consumption : 5000 l/min at 8 bar
 Weight: 80 Kg

Mini Air Grout I Plus

Air-driven piston diam 200
 Double effect pump
 Stroke: 150 mm
 Flow rate : 60 l/min max at 8 bar air pressure
 Injection pressure : max 85 bar with air pressure 8 bar
 Air consumption : 7000 l/min at 8 bar
 Weight: 80 Kg

OVERALL DIMENSIONS: 100 x 80 x H 145 cm – TOTAL WEIGHT: 180Kg


Mini Air Grout I / Mini Air Grout I Plus

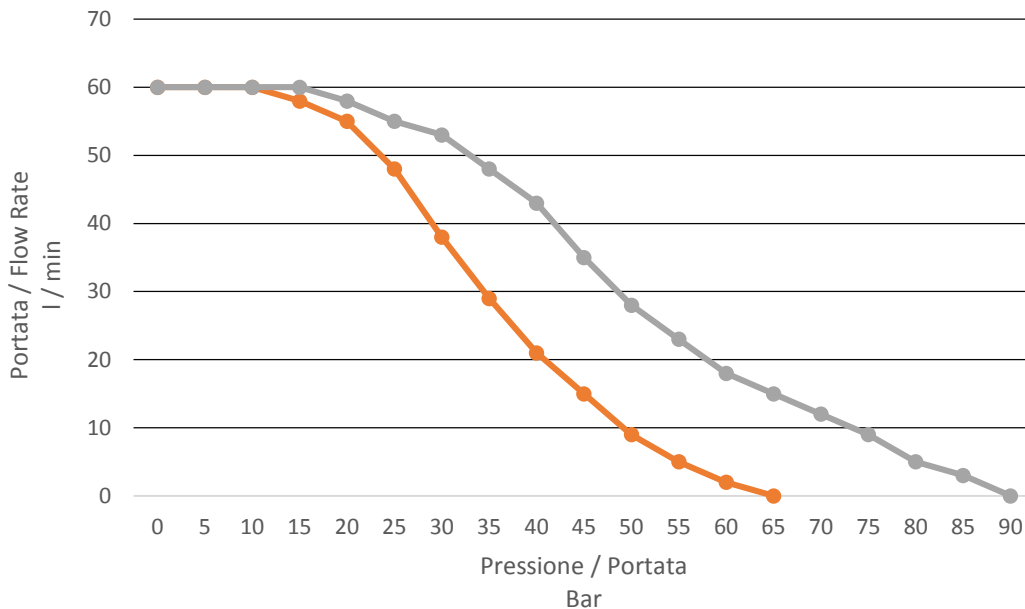

ACCESSORIES



GROUT HOSE



SHOTCRETE NOZZLE



OUTLET MANOMETER

ITALSWISS Engineering S.r.l.

Strada Romana di Sotto, 27 - 28877 ORNAVASSO (VB) - ITALIA