




tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

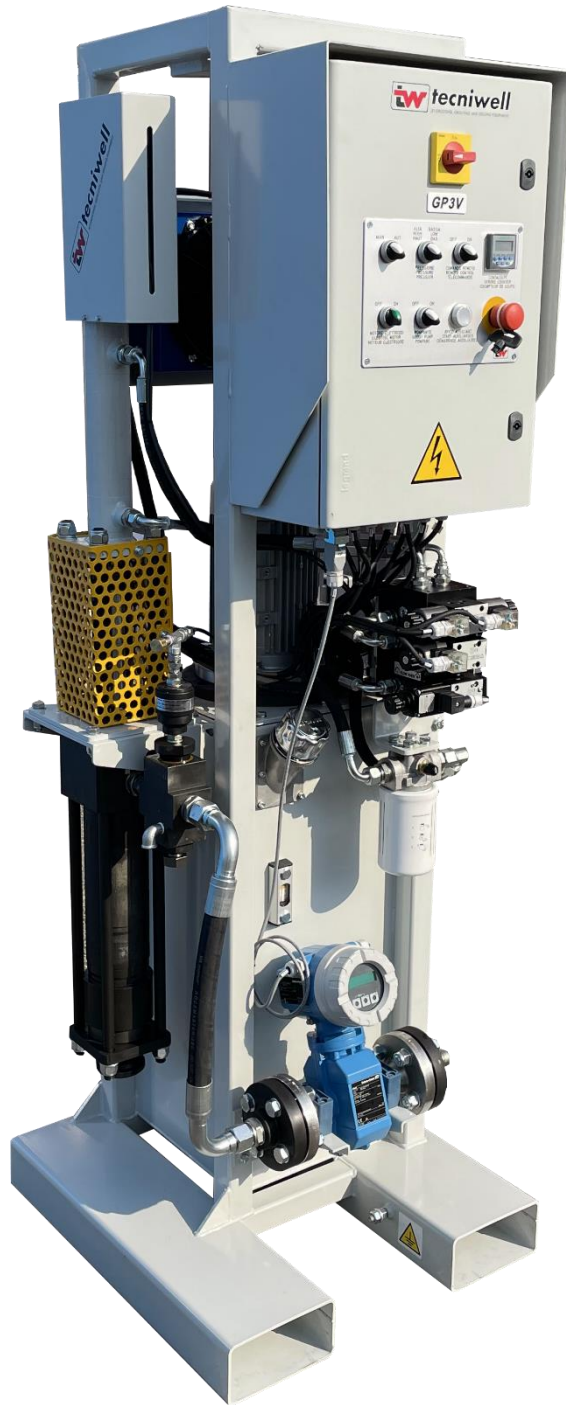

GP3V - GP5V - GP7V

VERTICAL GROUT PUMP

Overall dimensions and weight

Width	690 mm	2'3"
Lenght	645 mm	2'1"
Height	1985 mm	6'6"
Weight	380-480 Kg	837-1058 lb



TECHNICAL FEATURES

Double effect piston / piston à double effet / Doppelleffekt Kolben

Electric motor / moteur électrique / Elektromotor

3 Kw

5,5 kW

7,5 kW

Max flow rate / débit maximale / maximale Durchflussrate

**36 lt/min
9,5 gpm**

**62 lt/min
16,4 gpm**

Max pressure rate / pression maximale / maximal Druckrate

**90 bar
9 Mpa
1305 PSI**

**100 bar
10 Mpa
1450 PSI**

Piston diameter / diamètre du piston / Kolbendurchmesser

3"1/2 - 88,9mm

4" - 101,6 mm

Stroke / course / Hubweg

6" - 152,4mm

8" - 203,2 mm

Suction diameter / diamètre d'aspiration / Saugdurchmesser

2" - 50,8mm

3" - 76,2 mm

Output diameter / diamètre de sortie / Ausgangsdurchmesser

1" - 25,4mm

1"1/4 - 31,75 mm

tw tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT


Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecnivell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice

DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

GP3V

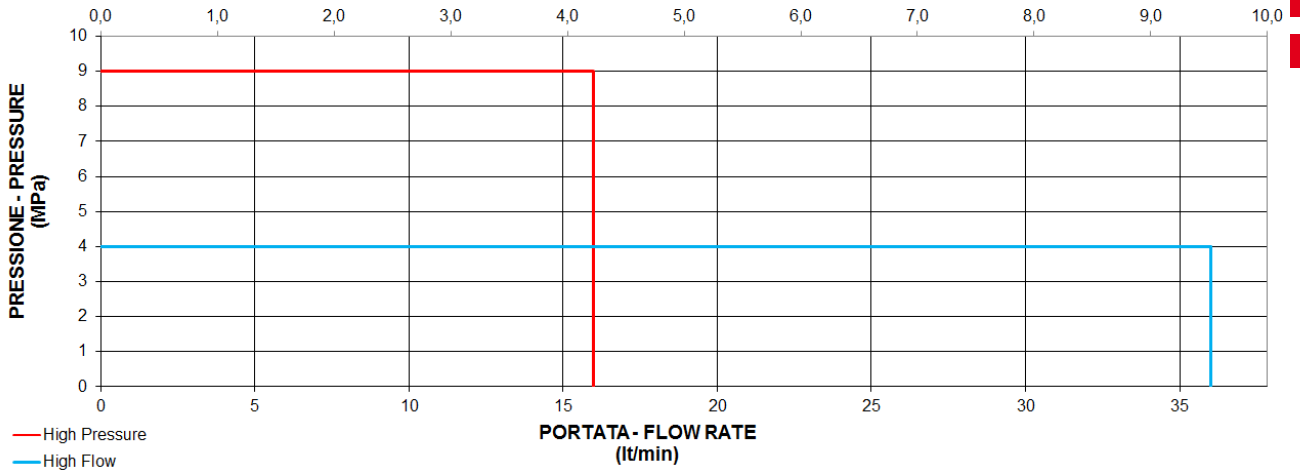


LCD Control panel (optional)
with recording system and preset volume / pressure
injection control



GP5V
GP7V

DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

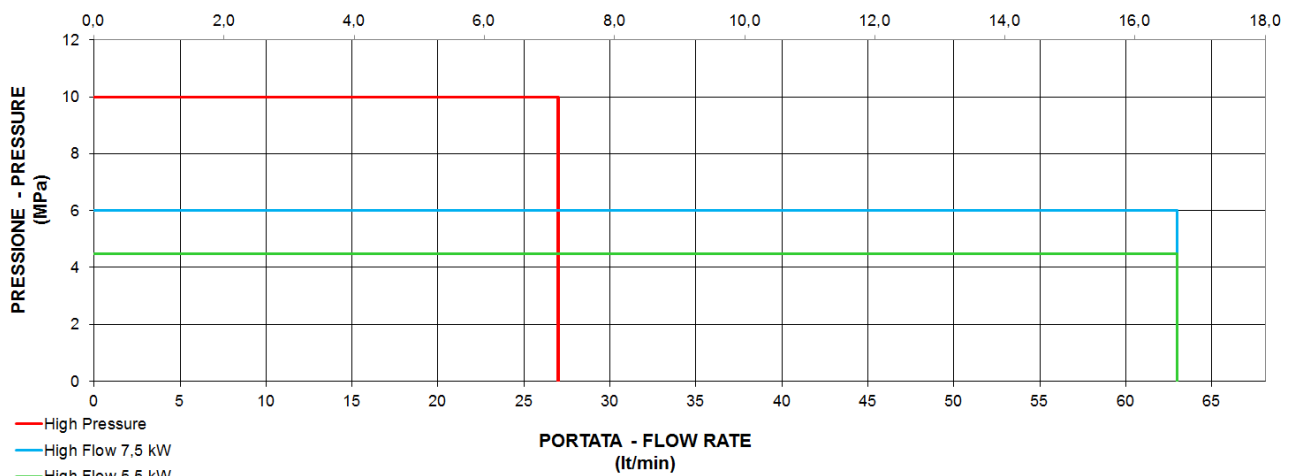



Productivity and **Reliability**
with full **Safety** compliance.

