



tecniiwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



TW600/V/E

ELECTRIC HIGH PRESSURE TRIPLEX PUMP



Technical Features


Max power input / puissance max / <i>maximale Kraft</i>	450 kW	610 HP	
Max pressure / pression maximale / <i>maximaler Druck</i>	49 MPa	490 bar	7106 psi
Max flow rate / débit maximale / <i>maximale Durchflussrate</i>	670 lt/min	177 gpm	
Piston diameter / diamètre du piston / <i>Kolbendurchmesser</i>	From 4" (101,6mm) to 4"1/2 (114,3mm)		
Stroke / Course / Hubweg	7" – 177,8		
Maximum stroke rate / coup par minute / <i>max Hub pro Minute</i>	130 / min	130 spm	
Suction diameter / diamètre d'aspiration / <i>Saugdurchmesser</i>	5"	127 mm	
Output diameter / diamètre de sortie / <i>Ausgangsdurchmesser</i>	2"	50,4 mm	

Bareshaft dimensions and weight

Width 1450 mm - 4'9"	Height 1310 mm - 4'3,5"	Lenght 2200 mm - 7'3"	Weight 5500 Kg - 12125 lb
----------------------	-------------------------	-----------------------	---------------------------

Container dimensions and weight

Width 2438 mm - 7'12"	Lenght 6055 mm - 19'10"	Height 2591 mm - 8'6"	Weight 13000 Kg - 28660 lb
-----------------------	-------------------------	-----------------------	----------------------------

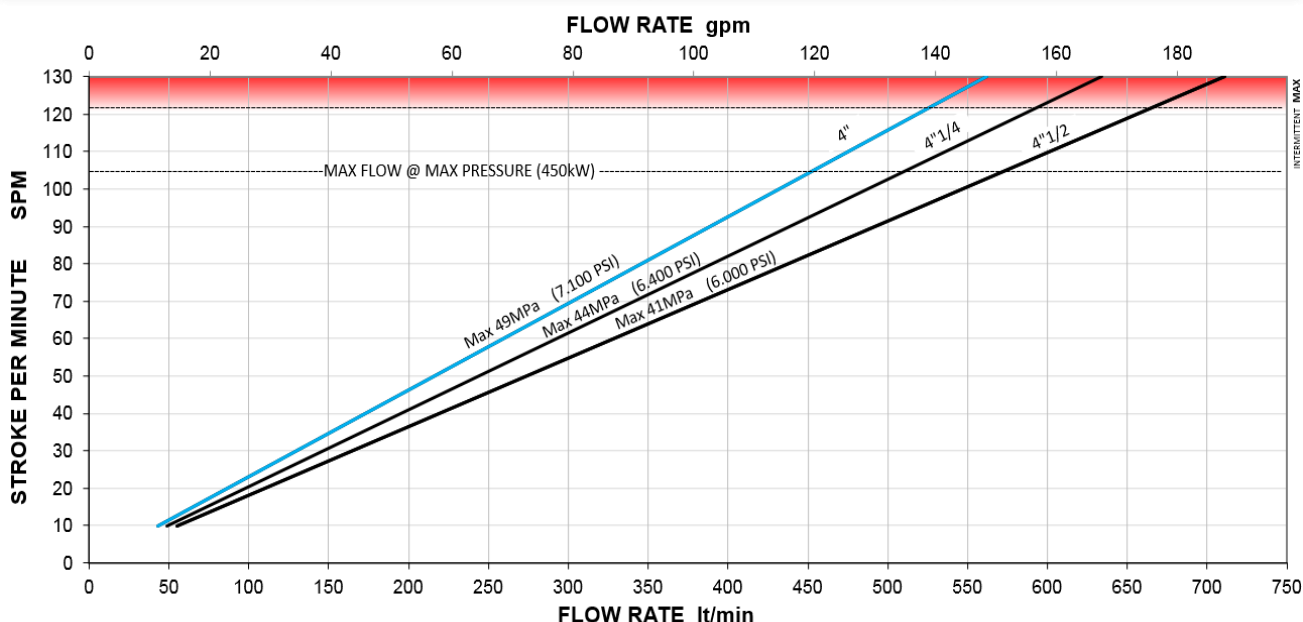

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice