



tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



GP9H / GP22H / GP22HFV

HORIZONTAL GROUT PUMP

Overall dimensions and weight

	GP9H		GP22H / GP22HFV	
Width	916 mm	3'	916 mm	3'
Length	1530 mm	5'	1770 mm	5'9"
Height	1150 mm	3'9"	1420 mm	4'8"
Weight	680 Kg	1500 lb	1100 kg	2425 lb



TECHNICAL FEATURES

Double effect piston / piston à double effet / Doppelleffekt Kolben

	GP9H	GP22H	GP22HFV
Max flow rate / débit maximale / maximale Durchflussrate	150 lt/min 40 gpm		215 lt/min 57 gpm
Max pressure rate / pression maximale / maximal Druckrate	90 bar 9 Mpa 1305 PSI	100 bar 9 Mpa 1450 PSI	90 bar 9 Mpa 1305 PSI
Piston diameter / diamètre du piston / Kolbendurchmesser	5" 127 mm		
Stroke / course / Hubweg	8" 203 mm		
Max stroke rate / coup par minute / max Hub pro Minute	32 / min - 32 spm		46 / min - 46 spm
Electric motor / moteur électrique / Elektromotor	9 kW	22 kW	
Suction diameter / diamètre d'aspiration / Saugdurchmesser	3" 76,2 mm		
Output diameter / diamètre de sortie / Ausgangsdurchmesser	1"1/4 31,75 mm		

DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

GP9H


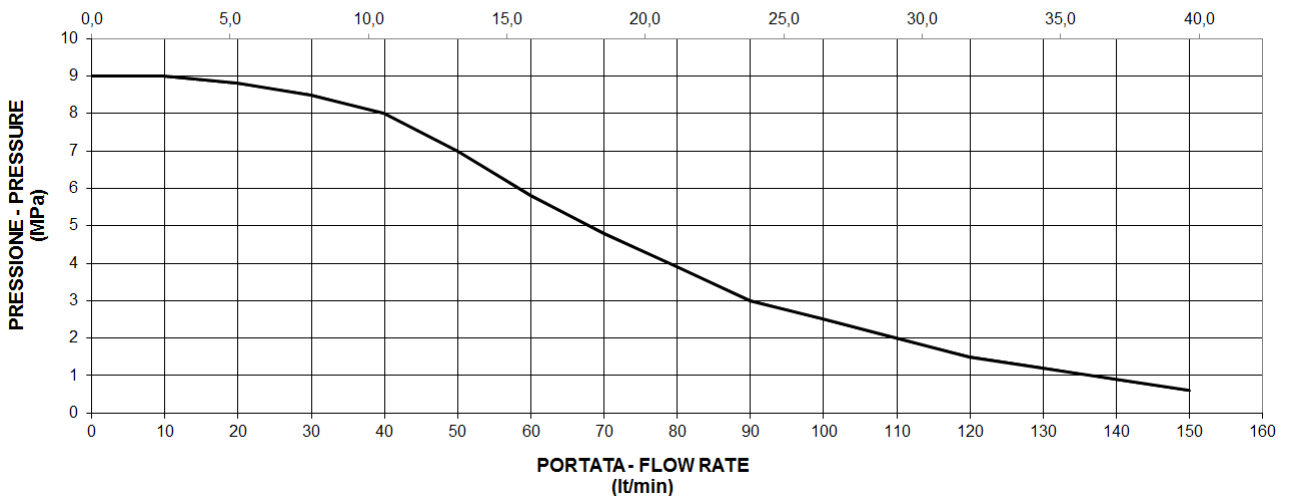


DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

GP22H

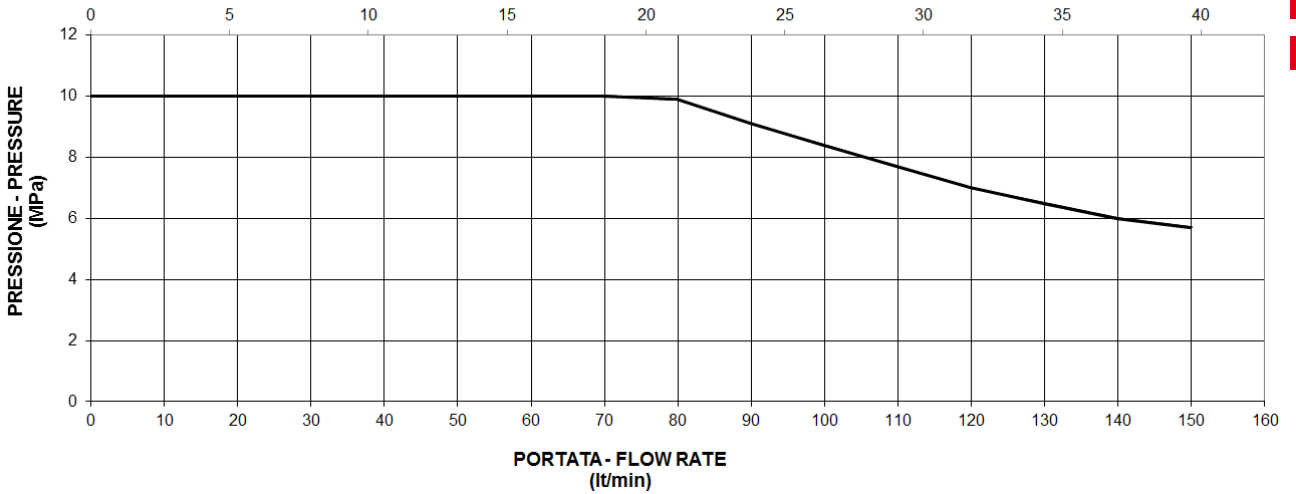

LCD Control panel (optional)
with recording system and preset volume / pressure injection control


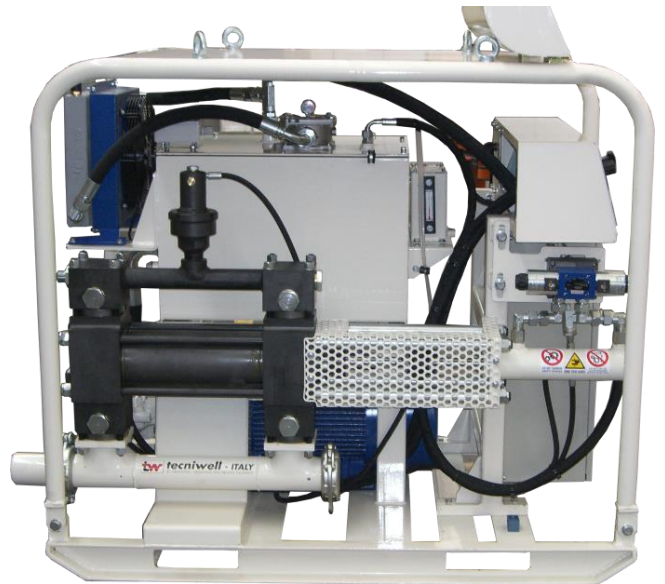


DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

GP22HFV



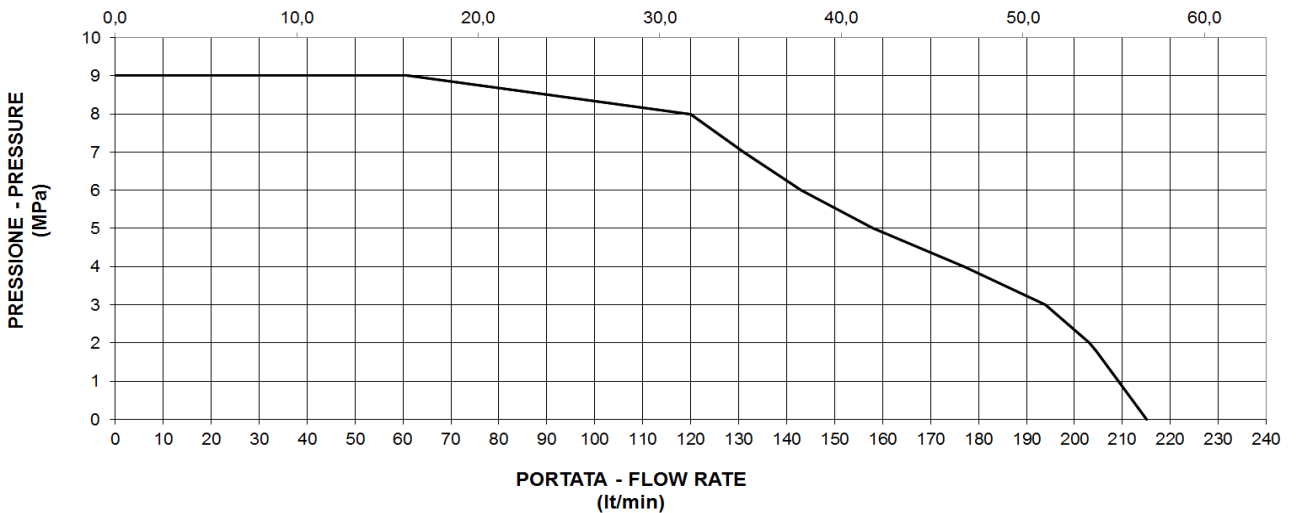

Productivity and **Reliability**
with full **Safety** compliance.

