



tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT




JP37H / JP45H

HORIZONTAL JETTING PUMP

Overall dimensions and weight

Width	1476 mm	4'10"
Length	2360 mm	7'9"
Height	1640 mm	5'5"
Weight	2500 Kg	5511 lb

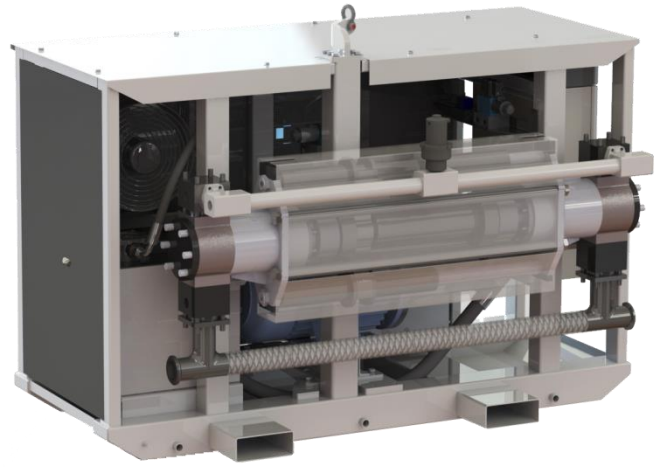


TECHNICAL FEATURES

Double piston / piston double / Doppelkolben	JP37H	JP45H
Max flow rate / débit maximale / maximale Durchflussrate	255 lt/min 67 gpm	355 lt/min 93 gpm
Max pressure rate / pression maximale / maximal Druckrate	240 bar 24 MPa 3480 PSI	
Piston diameter / diamètre du piston / Kolbendurchmesser	2" 1/2 - 3" - 3" 1/2 - 4" - 5" 64 - 76,2 - 89 - 101,6 - 127	
Stroke / course / Hubweg	16" 406 mm	
Max stroke rate / coup par minute / max Hub pro Minute	25 / min 25 / min	34 / min 34 spm
Electric motor / moteur électrique / Elektromotor	37 kW	45 kW
Suction diameter / diamètre d'aspiration / Saugdurchmesser	DN80 80 mm	
Output diameter / diamètre de sortie / Ausgangsdurchmesser	1" 25,4 mm	

DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)


JP37H

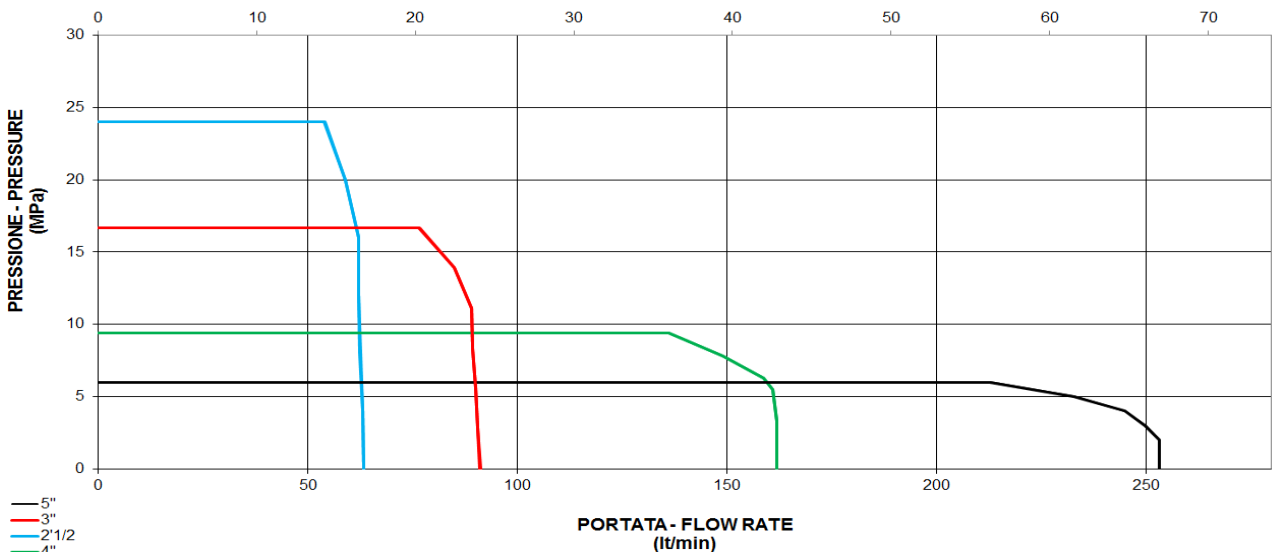

JP45H

DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

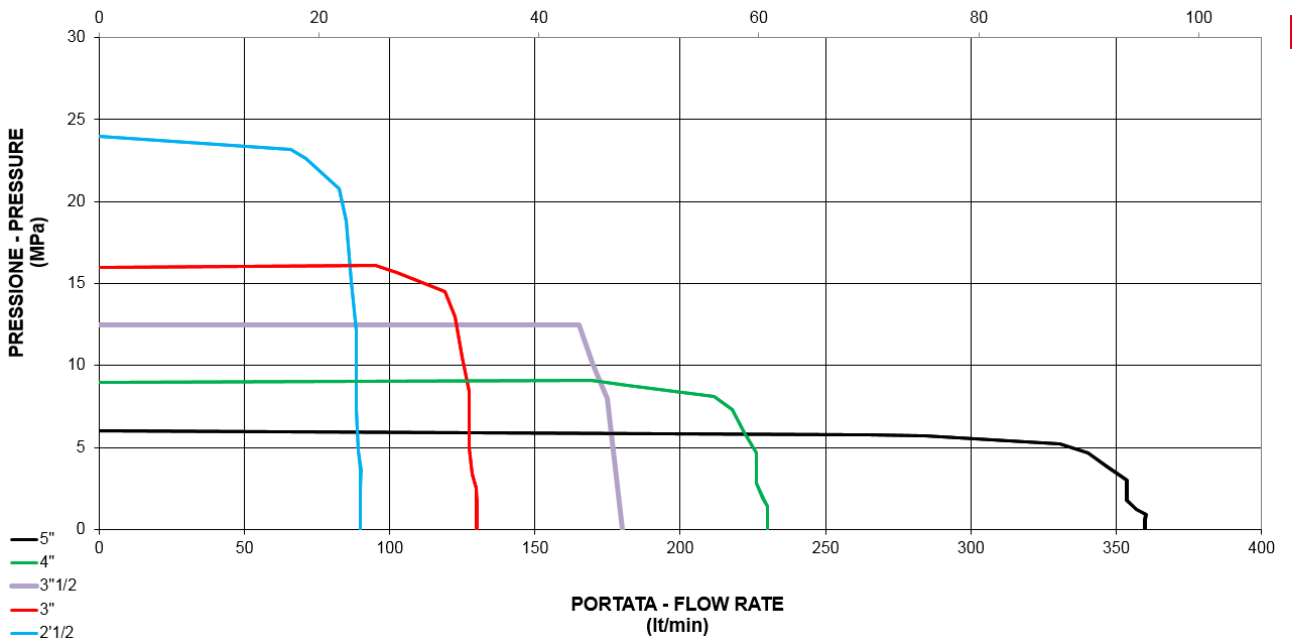

LCD Control panel (optional)
with recording system and preset volume / pressure
injection control



Productivity and **Reliability**
with full **Safety** compliance.

