



# tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



## TW 200

HIGH PRESSURE TRIPLEX PUMP



## Technical Features

<b>Power input / puissance / Kraft</b>	<b>180 kW</b>	<b>245 HP</b>	
<b>Max pressure / pression maximale / maximaler Druck</b>	<b>40 MPa</b>	<b>400 bar</b>	<b>5800 psi</b>
<b>Max flow rate / débit maximale / maximale Durchflussrate</b>	<b>360 lt/min</b>	<b>95 gpm</b>	
<b>Piston diameter / diamètre du piston / Kolbendurchmesser</b>	From 3" (76,2 mm) to 4" (101,6 mm)		
<b>Stroke / Course / Hubweg</b>	4" – 101,6 mm		
<b>Maximum stroke rate / coup par minute / max Hub pro Minute</b>	160 / min	160 spm	
<b>Suction diameter / diamètre d'aspiration / Saugdurchmesser</b>	3"	76,2 mm	
<b>Output diameter / diamètre de sortie / Ausgangsdurchmesser</b>	1"1/2	38,1 mm	


7" Control panel lcd monitor

### Bareshaft dimensions and weight

Width 1150 mm - 3'9"	Height 1030 mm - 3'5"	Lenght 810 mm - 2'8"	Weight 2800 Kg - 6172 lb
----------------------	-----------------------	----------------------	--------------------------

### Frame dimensions and weight

Width 2400 mm - 7'10"	Lenght 4800 mm - 15'9"	Height 2400 mm - 7'10'	Weight 9200 Kg - 20280 lb
-----------------------	------------------------	------------------------	---------------------------

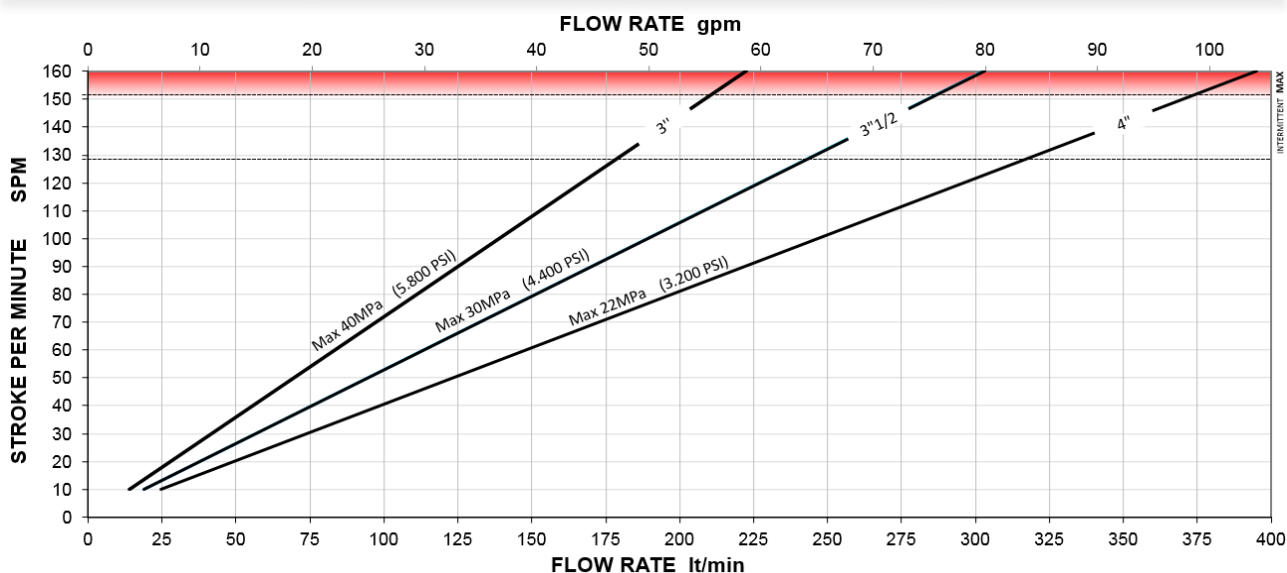

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086  
 e-mail: [info@tecniwell.com](mailto:info@tecniwell.com) – [www.tecniwell.it](http://www.tecniwell.it)

All technical data are purely indicative and subject to change without notice