



# tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



## TW 355

HIGH PRESSURE TRIPLEX PUMP



## Technical Features

<b>Max power input / puissance max / maximale Kraft</b>	<b>308 kW</b>	<b>418 HP</b>	
<b>Max pressure / pression maximale / maximaler Druck</b>	<b>80 MPa</b>	<b>800 bar</b>	<b>11600 psi</b>
<b>Max flow rate / débit maximale / maximale Durchflussrate</b>	<b>400 lt/min</b>	<b>105 gpm</b>	
<b>Piston diameter / diamètre du piston / Kolbendurchmesser</b>	From 2"1/2 (63,5mm) to 4" (101,6mm)		
<b>Stroke / Course / Hubweg</b>	5" – 127		
<b>Maximum stroke rate / coup par minute / max Hub pro Minute</b>	130 / min	130 spm	
<b>Suction diameter / diamètre d'aspiration / Saugdurchmesser</b>	4"	101,6 mm	
<b>Output diameter / diamètre de sortie / Ausgangsdurchmesser</b>	1"	25,4 mm	


7" Control panel lcd monitor

### Bareshaft dimensions and weight

Width 1328 mm - 4'4"	Height 875 mm - 2'10"	Lenght 2200 mm - 7'2"	Weight 5400 Kg - 11900 lb
----------------------	-----------------------	-----------------------	---------------------------

### Container dimensions and weight

Width 2100 mm - 6'11"	Lenght 5700 mm - 18'8"	Height 2300 mm - 7'6"	Weight 12000 Kg - 22046 lb
-----------------------	------------------------	-----------------------	----------------------------

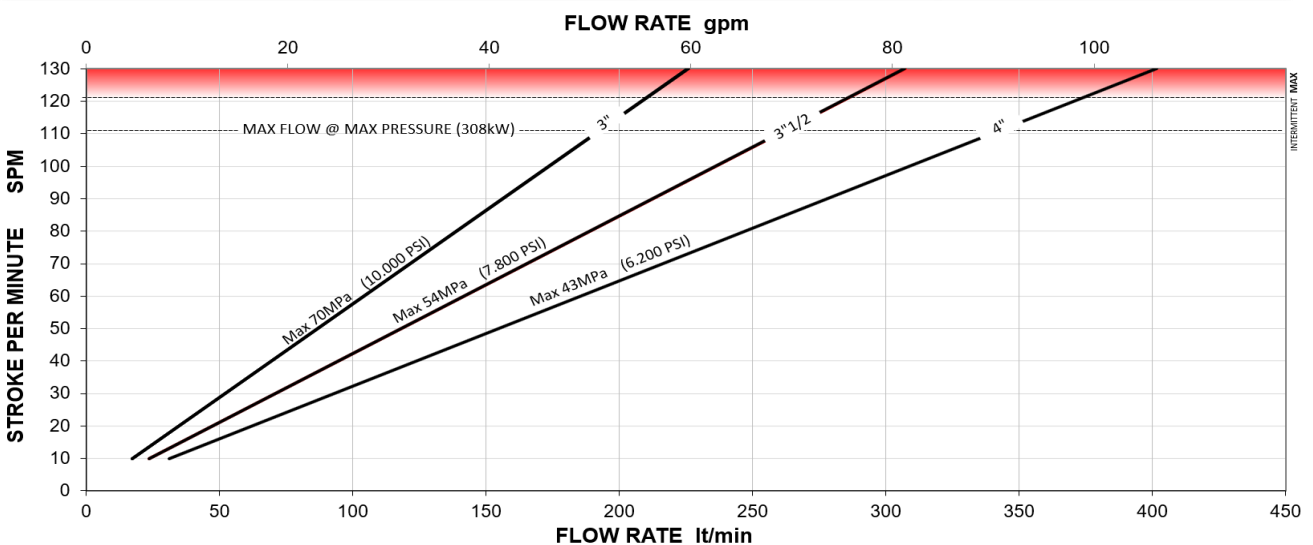

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086  
e-mail: [info@tecniwell.com](mailto:info@tecniwell.com) – [www.tecniwell.it](http://www.tecniwell.it)

All technical data are purely indicative and subject to change without notice