

PERFORAZIONE
DRILLING



DEMOLIZIONE
DEMOLITION

EX170THV EXCAVATOR ATTACHMENT DRILL

EX170THV È UN KIT DI PERFORAZIONE PROGETTATO PER UTILIZZO DI PERFORATRICI A ROTO PERCUSSIONE ESTERNA, MONTATE SUL NOSTRO PROFILO IN ACCIAIO S170, CON AVANZAMENTO A PISTONE E TENDI TUBI IN LINEA, SVILUPPATO PER ESSERE MONTATO SU ESCAVATORI DI PICCOLA/MEDIA PORTATA (> 9 TON). I KIT, ESTREMAMENTE LEGGERI E COMPATTI SONO DISPONIBILI IN VARIE VERSIONI PER POTER RISPONDERE ALLE VOSTRE ESIGENZE DI CANTIERE

EX170THV IS A DRILLING KIT DESIGNED FOR USE OF TOP HAMMER DRIFTER, MOUNTED ON OUR S170 STEEL PROFILE, WITH PISTON FEED AND IN-LINE HOSE REEL, DEVELOPED TO BE MOUNTED ON SMALL/MID SIZE EXCAVATORS (>9 TON). EXTREMELY LIGHT AND COMPACT, THEY ARE AVAILABLE IN VARIOUS VERSIONS



TECHNICAL SPECIFICATIONS

Excavator size	> 9 ton
Drill mast	S 170 Piston feed
Stroke	Standard 2150 mm/3250 mm
Pull back / down	2.000 kg/1500 kg
Base frame and Kinematic	- Include plate to attach to your excavator with • single slew for mast rotation (180° +180°) • extra slew mounted at 90° than first one to allow every drilling direction • Back feed 800 mm • Extra piston for mast inclination (+5/-15°) • In line hose reel • Support legs for storage
Hydraulics	7 proportional valves (rotation/ percussion/ feed/ slew1/ slew 2/ back feed/ inclination)
Controls	Radio remote control and 5" LCD screen for diagnostic and setting
Data log	On request




DRIFTERS

Rock Drill	MR40, DOOFOR 430/530/538
Anchor Drill	EURODRILL 1001/1002

Other Drifters available on request

ACCESORIES

Hydraulic centrizer for R25/R32/T38
Hydraulic centr + clamps R25,R32,T38
Single clamp 25/90 mm
Clamping and Breaking device 25/90 mm
Dust collector (if oil flow available)
Compressor (if oil flow available)
Shank lubrication system with air line
Shank lubrication system without air line
Safety guard

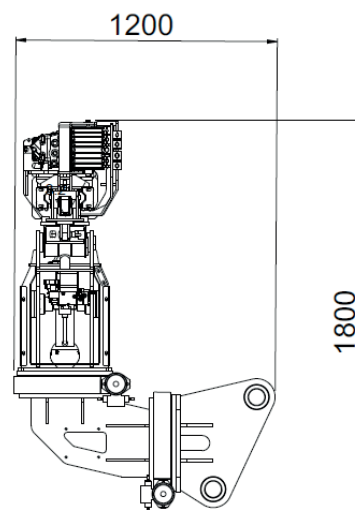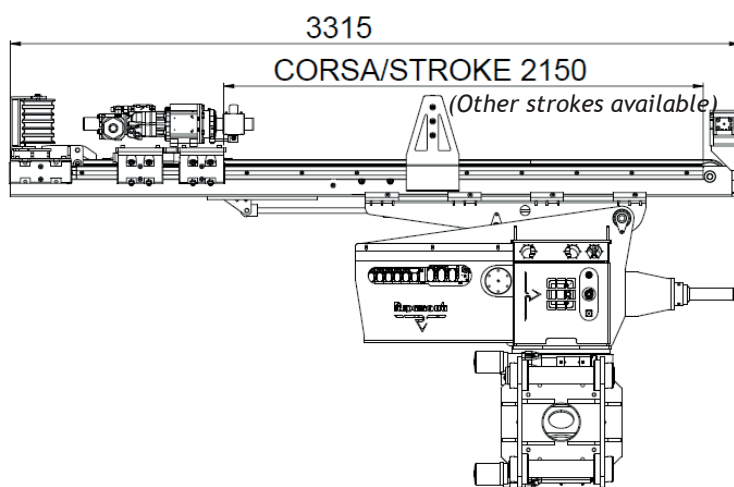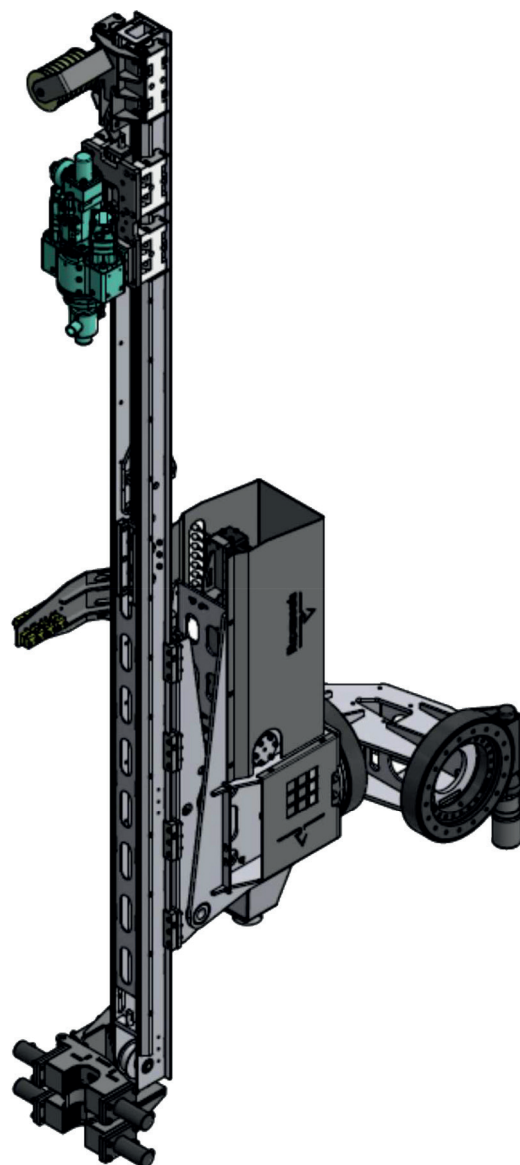

Ripamonti continuously improves its products and so reserves the right to modify technical data if necessary without prior notice.



STRADA ROMANA DI SOTTO, 27
TEL. +39 0323 838211 FAX +39 0323 836147

28877 ORNAVASSO (VB) ITALY
WWW.RIPAMONTI.NET INFO@RIPAMONTI.NET