




tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

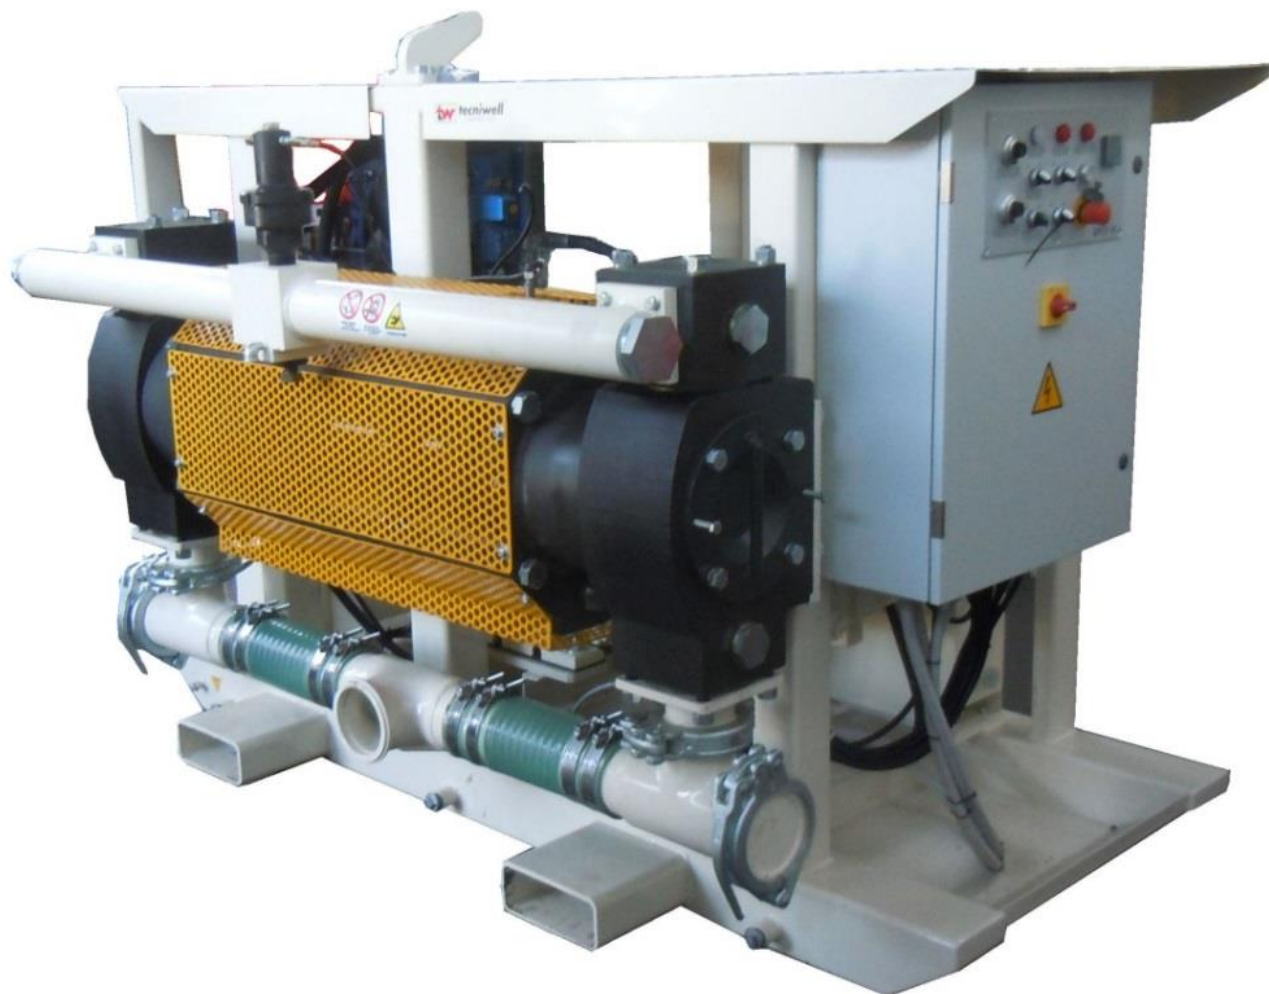

GP37H / GP45H / GP55H

HORIZONTAL GROUT PUMP

Overall dimensions and weight

Width	1476 mm	4'10"
Lenght	2450 mm	7'9"
Height	1640 mm	5'5"
Weight	2500 Kg	5511 lb



TECHNICAL FEATURES

Double piston / piston double / Doppelkolben

Max flow rate / débit maximale / maximale Durchflussrate

Max pressure rate / pression maximale / maximal Druckrate

Piston diameter / diamètre du piston / Kolbendurchmesser

Stroke / course / Hubweg

Max stroke rate / coup par minute / max Hub pro Minute

Electric motor / moteur électrique / Elektromotor

Suction diameter / diamètre d'aspiration / Saugdurchmesser

Output diameter / diamètre de sortie / Ausgangsdurchmesser

GP37H	GP45H	GP55H
575 lt/min 151 gpm	585 lt/min 157 gpm	800 lt/min 211 gpm
50 bar 5 MPa 725 PSI		
6" – 7" – 7"1/2 152,4 - 177,8 - 190,5		
10" 254 mm		16" 406 mm
40 / min 40 spm		
37 kW	45 kW	55 kW
5" 127 mm		
3" 76,2 mm		

DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

GP37H

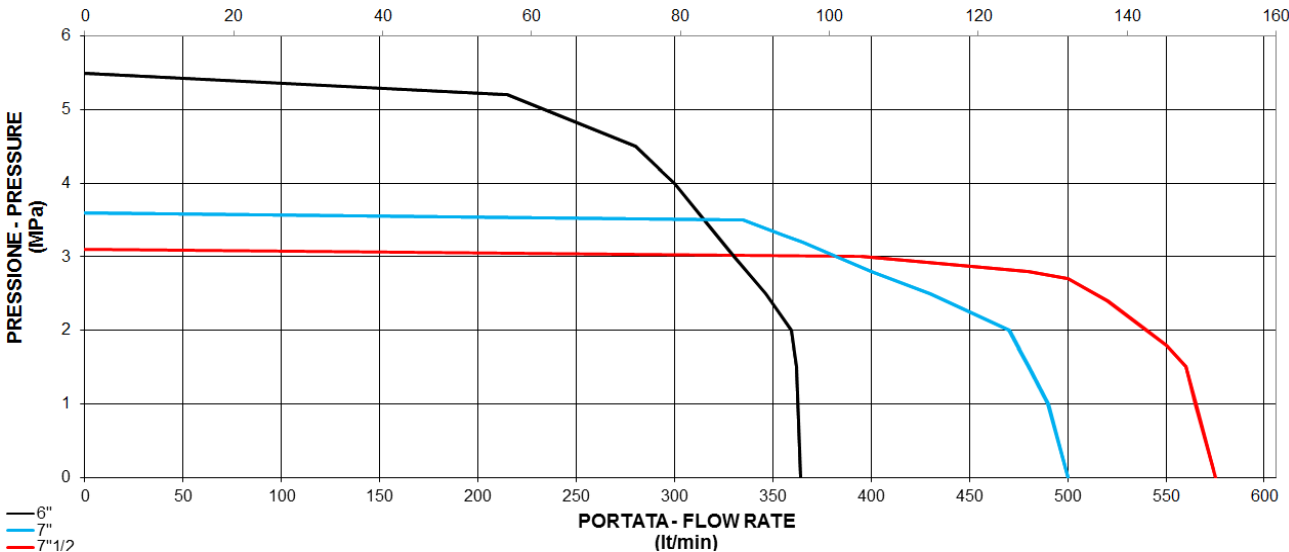


DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

GP45H



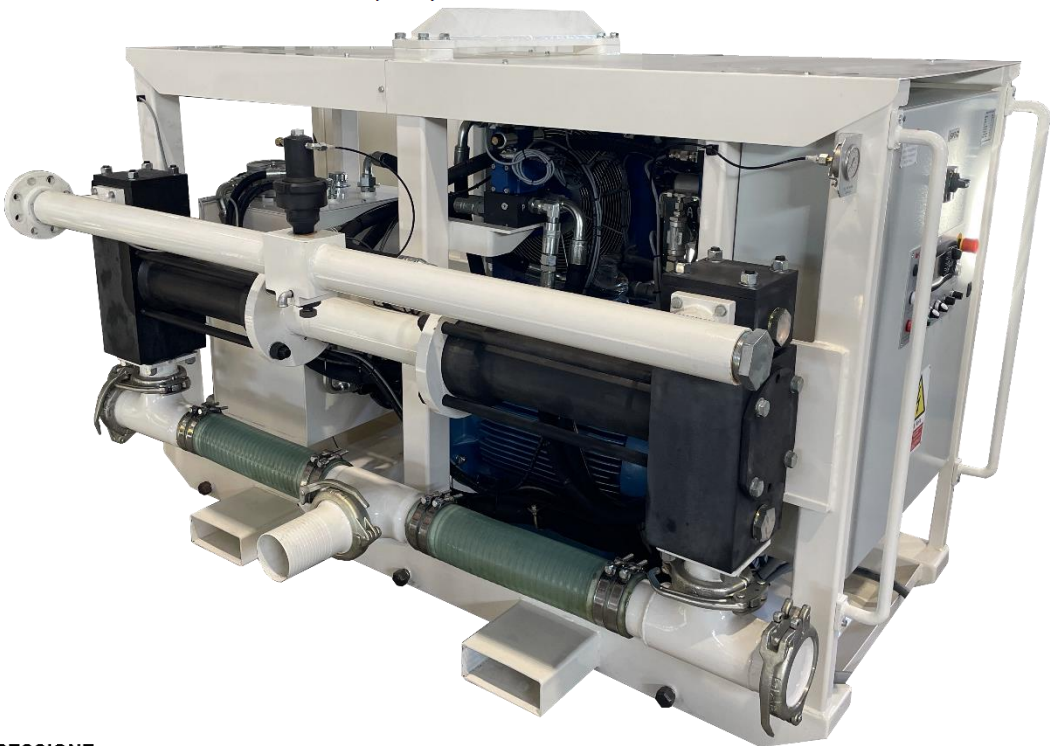


DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

GP55H

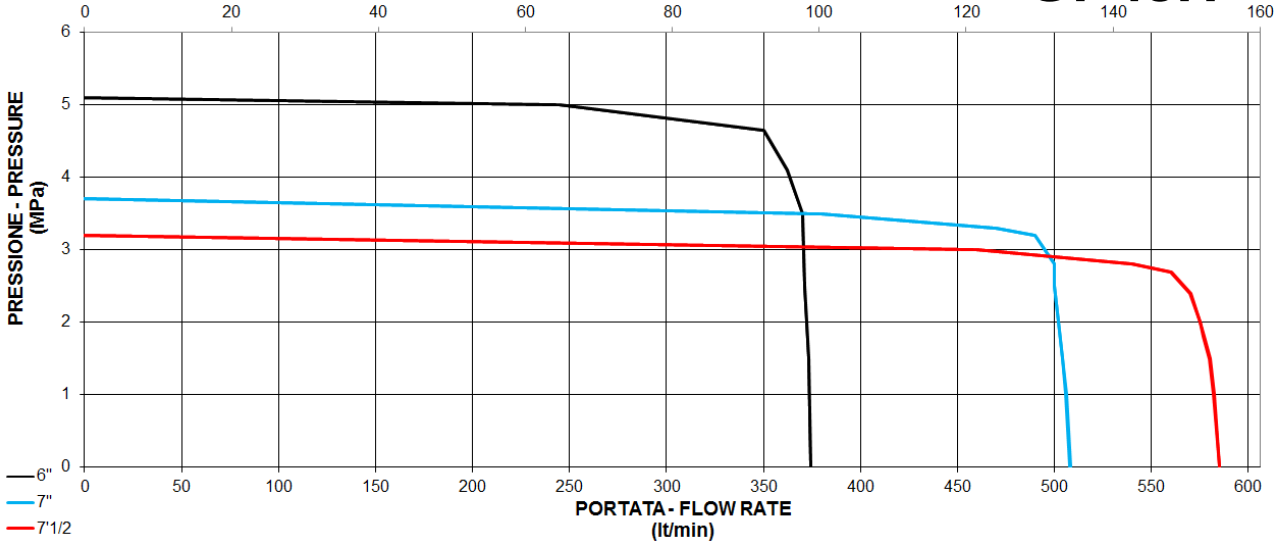

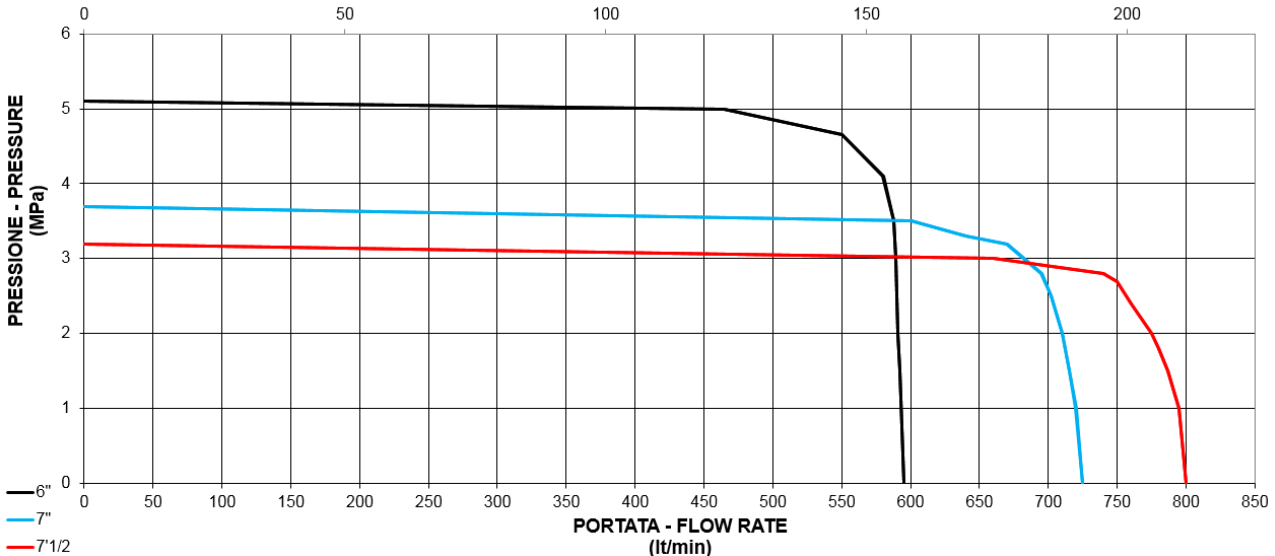

Productivity and **Reliability**
with full **Safety** compliance.

